


# MULTISPORT SHOT-CLOCKS Readability 100 m

BASKET BALL

## SCX 24 Autonom outdoor

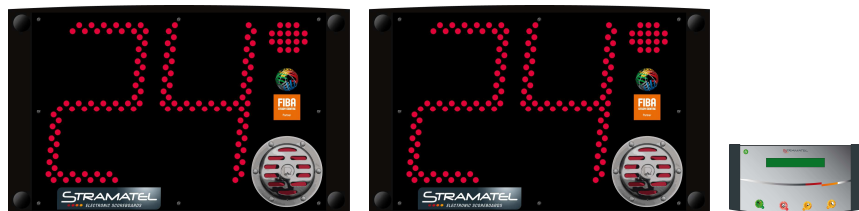

(non contractual picture)



### Composition

- 2 electronic display boards
- 1 control console
- 1 carrying case for control console
- 2 main cables
- 2 polycarbonate stands (Floor installation)
- Operating and installation instructions

### Description

- Use :** Outdoor
- Transmission :** Radio (868 MHz) or Cable – works independently from main scoreboard
- Readability :** 100m, angle >160°
- Dimensions :** 500 x 300 x 65 mm
- Weight :** 2,5 kg per unit
- Power supply :** 230V / 50-60Hz
- Power consumed:** 30 VA
- Protection :** Unbreakable matte polycarbonate front face (DIN 18032-3)
- Integrated Horn:** 96dB at 1m
- Mains cable:** 2 x 25 m – Type: 230V, 3G, 0.75 mm<sup>2</sup>
- Transmission cable :** for cable controlled model

### Display functions

- 24/14 second attack timer:** 2 red LED digits (23 cm) per display
- Timer Stop:** 1 red LED dots (5 cm) per display

### Control consoles

- 1 console:** (340 x 175 x 60 mm) with LCD screen
  - 1 charger (radio):** Hold the consoles in charge when there are not in use. (Autonomy max 16 h)
  - 1 carrying case:** for control console (360 x 260 x 90 mm)
- WORK INDEPENDANTLY FROM A MAIN SCOREBOARD**

### Options

- Installation support frame** (for installation behind the Basket Ball Backboards)
- Led Strip:** Electric light to be installed behind the backboard, connected with the 24 second shot clocks, synchronised with the main timer to light up at the end of each period

